


- Miniature 7 x 5 x 2.3mm SMD package
- Frequency range: 1.25MHz to 40.0MHz
- Supply voltage 2.5, 3.0 or 3.3 Volts
- Frequency stability from ± 0.5 ppm



DESCRIPTION

EM572T series TCXOs are packaged in a miniature 4 pad ceramic SMD package. With squarewave (CMOS) output, tolerances are available from ± 0.5 ppm.

SPECIFICATION

Product Series Code	EM572T
TCXO:	EM572T
VCTCXO:	VEM572T
Frequency Range:	1.25MHz to 40.0MHz
Output Waveform:	Squarewave, LVCMOS
Initial Calibration Tolerance:	$< \pm 2.0$ ppm at $+25^{\circ} \pm 2^{\circ}C$
Standard Frequencies:	10.0, 12.8, 13.0, 14.47456, 16.0, 16.384, 19.2, 19.440, 19.68, 20.0, 25.0 and 27.0MHz (Partial list)
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	± 1.0 ppm max. first year @25C
vs. Voltage Change:	± 0.3 ppm max. $\pm 5\%$ change
vs. Load Change:	± 0.3 ppm max. $\pm 10\%$ change
vs. Reflow:	± 1.0 ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.5, +3.0 or +3.3V
Output Logic Levels:	Logic High: 90% Vdd min. Logic Low: 10% Vdd max.
Rise and Fall Times:	10ns max.
Duty Cycle:	50% \pm 10% standard, 50% \pm 5% option
Start-up Time:	5ms typ., 10ms max.
Current Consumption:	27mA max.
Output Load:	15pF
Storage Temperature:	-55~+125°C


VEM572T VOLTAGE CONTROL SPECIFICATION

Control Voltage Centre:	Standard = $+1.5 \pm 1.0$ Volts for all input voltages.
Frequency Deviation:	± 5 ppm (Vcon = $+1.5 \pm 1.0$ V)
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	50M Ω minimum
Modulation Bandwidth:	20kHz minimum
Linearity:	$\pm 10\%$ maximum

SSB PHASE NOISE at 25°C, 15pF

Offset: dBc/Hz	10Hz	100Hz	1kHz	10kHz	100kHz
EM572T33 10.000MHz	-96	-122	-138	-145	-150

EM572T - OUTLINES AND DIMENSIONS

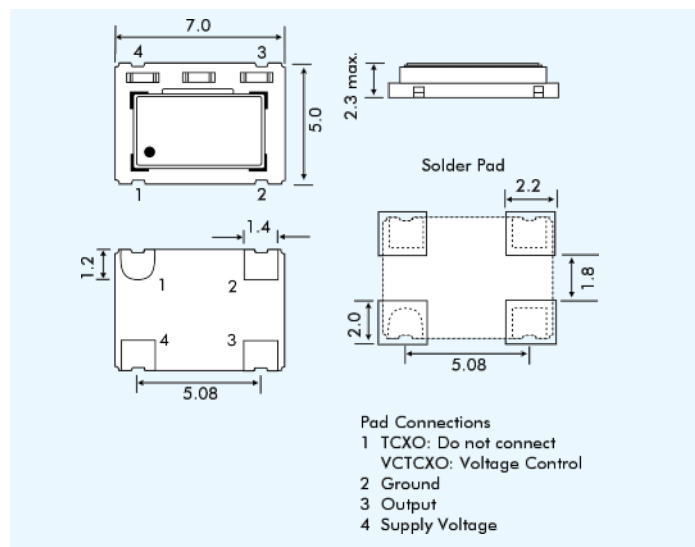

FREQUENCY STABILITY

Frequency Stability (ppm)	± 0.5	± 1.0	± 1.5	± 2.0	± 2.5	± 3.0
Temperature Range (°C)						
0 ~ +50	✓	✓	✓	✓	✓	✓
-10 ~ +60	ASK	✓	✓	✓	✓	✓
-20 ~ +70	x	✓	✓	✓	✓	✓
-30 ~ +75	x	✓	✓	✓	✓	✓
-40 ~ +85	x	ASK	✓	✓	✓	✓

✓ = available, x = not available, ASK = call Tech. Sales

PART NUMBERING PROCEDURE

Example: **EM572T33-27.000-2.5/-30+75**

Series Description
 TCXO = EM572T
 VCTCXO = VEM572T
 Supply Voltage
 25 = 2.5VDC
 3 = 3.0VDC
 33 = 3.3 VDC
 Frequency (MHz)
 Stability over OTR (\pm ppm)
 Operating Temperature Range (OTR) (°C)
 Lower and upper limits.