

- Miniature SMD 5 x 3.2mm package
- Frequency range: 10MHz to 52MHz
- Close tolerance stability available from  $\pm 0.5$ ppm
- Supply voltage 1.8, 2.5V, 2.8, 3.0, 3.3VDC
- Very low power consumption



### DESCRIPTION

(V)EM53S series TCXOs are packaged in a miniature 2.0x1.6mm ceramic SMD case. With clipped sinewave output, tolerances are available from  $\pm 1.0$ ppm over  $-40^{\circ}$  to  $+85^{\circ}$ C. The part exhibits low supply current, 3.5mA max. 3.3V 52MHz.

### SPECIFICATION

Product Series Code	TCXO: EM21S VCTCXO: VEM21S
Frequency Range:	10MHz to 52MHz
Output Waveform:	Clipped Sine
Initial Calibration Tolerance:	$< \pm 1$ ppm at 25°C
Standard Frequencies:	10.0, 12.8, 13.0, 14.40, 14.7456, 15.36, 16.367667, 16.384, 19.2, 19.44, 20.0, 25.0, 26.0, 27.0 MHz
Operating Temperature Stab:	See table
Frequency Stability vs. Ageing:	$\pm 1.0$ ppm max/Year at 25°C
vs. Voltage Change:	$\pm 0.2$ ppm max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.2$ ppm max. $\pm 10\%$ change
vs. Reflow (SMD type):	$\pm 1.0$ ppm max. for one reflow (measured after 24 hours)
Supply Voltage:	+1.8VDC $\pm 5\%$ , +2.5VDC $\pm 5\%$ , +2.8VDC $\pm 5\%$ , +3.0VDC $\pm 5\%$ , +3.3Volts $\pm 5\%$
Start-up Time:	5ms typical, 10ms max.
Output Load:	10k $\Omega$ max./10pF $\pm 10\%$
Current Consumption:	2.5mA max.
Harmonic Distortion:	-10dB typical, -7dB max.
Storage Temperature:	$-40^{\circ}$ C to $+85^{\circ}$ C

### FREQUENCY STABILITY OVER OPERATING TEMP

Stability	0.5ppm	1.0ppm	1.5ppm	2.0ppm	2.5ppm	3.0ppm
0°C to +50°C:	✓	✓	✓	✓	✓	✓
-10°C to +60°C:	Ask	✓	✓	✓	✓	✓
-20°C to +70°C:	Ask	✓	✓	✓	✓	✓
-30°C to +75°C:	Ask	✓	✓	✓	✓	✓
-30°C to +85°C:	Ask	✓	✓	✓	✓	✓
-40°C to +85°C:	Ask	Ask	✓	✓	✓	✓


### VEM53S VOLTAGE CONTROL SPECIFICATION

Control Voltage	Vdd = +2.5V: Vcon centre = +1.4V $\pm 1$ V Vdd = +3.3V/5V: Vcon centre = +1.5V $\pm 1$ V
Frequency Pulling Range:	$\pm 5$ ppm min.
Slope Polarity:	Positive (increase of control voltage increases output freq.)
Linearity:	$\pm 5\%$ typical $\pm 10\%$ max.
Input Impedance:	1M $\Omega$ typical
Modulation Bandwidth:	10kHz min. measured at +3dB

### SSB PHASE NOISE at 25°C

Offset	10Hz	100Hz	1kHz	10kHz	100kHz	
Test Frequency 13.0MHz	(dBc/Hz)	-80	-115	-135	-148	-148

### EM21S- OUTLINES AND DIMENSIONS

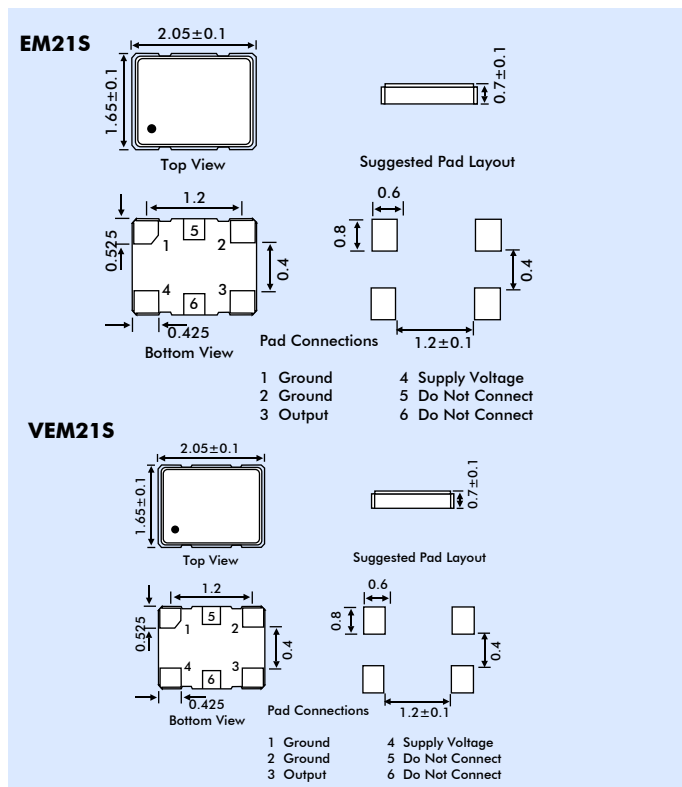

### PART NUMBERS

